

GRYB wants to fundamentally transform the attachment and implements industry into a customer driven experience, fueled through the needs and challenges of the global market.

GRYB is at the core of a group of companies offering attachment solutions in the material handling, forestry & land clearing, steel production & distribution, construction, and ag & light industrial industries.



GRYB CONSTRUCTION

GRYB's excavator products are part of the GRYB Construction division. Our products represent quality, meticulously crafted to surpass industry standards. Engineered with precision and durability in mind, they fortify infrastructure with unwavering reliability. Trust in our construction solutions for excellence that stands tall.



COUPLERS

- 6 AHS Wedge Attachment
- 7 Pin Grabber
- 8 Quick Hitch
- 8 GTR Tiltrotator



- 24 Hydraulic Thumb on Axle
- 24 Progressive Hydraulic Thumb
- 24 Universal Hydraulic Thumb

BUCKETS

14	HD Digging Bucket Welded Side Cutters
14	SHD Super Heavy Duty Bucket Welded Side Cutters
14	XHD Extreme Duty Bucket Welded Side Cutters
15	HD Digging Bucket Bolted Side Cutters
15	SHD Super Heavy Duty Bucket Bolted Side Cutters
17	Digging Bucket Options
18	Ditching Bucket
18	Tilt Ditching Bucket
18	Skeleton Bucket With Teeth
19	4 in 1 Bucket
19	Grapple Bucket
19	Trapezoidal Bucket
20	Recessed Bucket
20	Screening Bucket
21	Grading Bucket

- 21 Grading Bucket With Minimized Corners
- 21 Digging Bucket
- 21 Trench Bucket

SPECIALTY PRODUCTS

	28	Female Lugs
	28	Female Lugs With Top Plates
	28	Reversible Female Lugs
	29	Root Rake
	29	Concrete Pulverizer
	29	Ripper
	30	FC Plate Adapter
	30	Pallet Fork
	30	Asphalt Cutter
	31	Construction Grapple
	31	Sorting Grapple





EXCAVATOR ATTACHMENTS GUIDE

COUPLERS

















AHS WEDGE ATTACHMENT

carrier weight 10 to 49 tons Type Mechanical or hydraulic weight 285 to 1,135 lbs



The AHS Coupling System combines innovation and simplicity. Designed and created by GRYB, this coupling system takes the excavation game to a whole-new level.

The compact design of the AHS includes a hydraulic dual-action, double cylinder and a lock valve, reducing the risk of getting stuck.

The angles of the locking blocks eliminate jamming and facilitate hydraulic unlocking. Available in mechanical or hydraulic configurations, which can be easily converted.

THE AHS IS DESIGNED TO INCREASE PRODUCTIVITY WITH A QUICK RETURN ON YOUR INVESTMENT.

- 1 The capacity of putting your attachments in reverse position optimizes your time on site. Work faster near foundations.
- 2 Efficient installation so that you can focus on getting the job done.
- **3** Reduced risk of breakage or leakage.

THE OTHER WAY AROUND

The AHS Coupling System can be used in reverse position, which increases efficiency when working near home foundations. Save time on job sites and maximize output.





PIN GRABBER

carrier weight 10 to 49 tons	Locking Hydraulic sliding jaw	weight 490 to 1,620 lbs	
			Scan for complete product specifications

The GRYB hydraulic Pin Grabber Coupling System allows you to work with a wide range of attachments. Made of heavy-duty steel, the sliding jaw design allows it to fit into multiple pin centers, permitting the handling of various OEM attachments with ease.

Use this equipment in reverse position with all its compatible attachments.

MAXIMIZE UPTIME WITH THE PIN GRABBER. BE UP AND RUNNING IN NO TIME!

- 1 Take advantage of the versatility this tool can bring to your machine. Perform different tasks without the need for specialized equipment.
- 2 The ability to switch attachments rapidly significantly increases cost savings. Make your business more profitable by using the pin grabber coupling system.
- 3 Safety first. This system enhances safety and eliminates the risk of your operators and their colleagues getting hurt.



DOUBLE SAFETY FEATURE

The d ouble safety feature offers two advantages. Firstly, it eliminates the likelihood of an attachment dropping on site. Secondly, it prevents incorrect grasping of the pin attached to the lugs. These benefits serve to safeguard you and your colleagues in the event of any hydraulic malfunctions.





QUICK HITCH

Type

Carrier weight		
10 to 14 tons		

Mechanical

Weight 425 lbs



The Mechanical Quick Hitch Coupling System optimizes the power of your excavator and simplifies your workflow so that you can save on time. Increase your machine's breakout force and switch attachments with ease.

The strong design of this attachment brings incredible value to your workforce. Transfer attachments between your machines of similar carrier weight. The design of the Quick Hitch allows you to use your attachment to its fullest, enabling you to save time and increase profitability!

INCREASED COMPATIBILITY

Having a quick hitch coupler provides the benefit of increased compatibility, allowing for seamless attachment transfer between same-category excavators. It provides a universal connection point, enabling you to use a wide range of tools and implements with your machinery.





GTR TILTROTATOR

Carrier weight 2 to 30 tons

Rotation Infinite 360°

Tilting 40° on both sides

Scan for complete product specifications

Consider the GTR Tiltrotator as an extension to your machine's arm, providing the operator with the power to work with precision, agility, and efficiency. The GTR Tiltrotator excels on complicated jobs it will transform your operations by delivering the highest productivity, accuracy, and versatility possible. Unlock endless possibilities with one of the most performant attachments on the market.

5% SAVINGS **ON FUEL**



GREASE-FILLED GEAR HOUSING FOR IMPROVED PERFORMANCE AND LOW MAINTENANCE.

GTR TILTROTATOR MODELS



GTRO4 For 2 to 4 ton excavators



GTR18 For 14 to 18 ton excavators



GTRO6 For 3 to 6 ton excavators



GTR22 For 16 to 22 ton excavators



GTR10 For 6 to 10 ton excavators



GTR28 For 22 to 30 ton excavators



GTR15 For 10 to 16 ton excavators

GTR TILTROTATOR KEY FEATURES

3D GRADE CONTROL GATEWAY

Optional machine control integration systems can bring the Tiltrotator's tilt and rotation sensors into your machines 2D/3D technology.

CENTRALIZED LUBRICATION SYSTEM

Reduces number of lubrication points. Can be connected to the excavators lubrication system (if available).

WHEEL/TRACK STEERING

Wheel-Track steering systems are also available for momentary control of these functions from the joysticks.

ADVANCED CONTROL SYSTEM

Control your attachment with unparalleled precision with dual joystick controllers, a graphic touchscreen, optional track and wheel steering as well as multiple user profiles.

OPTIONAL GRIP MODULE

The GRYB grip module takes up very little space under the Tiltrotator and can be easily removed and reattached when needed without affecting the use or connection of the attachment. COUPLERS

BUCKETS

MOUNT TYPES

The GTR Tiltrotators can be mounted differently according to your needs. Either fitted directly to your excavator or using the sandwich method, using the Hardlock[®] Quick Coupler or the Fast Change Coupler.

HARDLOCK[®] QUICK COUPLER

Switch attachments in a flash with the Hardlock® Quick Coupler which offers an added level of safety with double-locking devices, standard rear locking, and excentric locking system.



FAST CHANGE COUPLER

With the Fast Change Coupler, stay in your cab at all times. It will bring maximum time savings to your business. The quick-release system can be combined with an FC Tiltrotator, making it easy to connect and disconnect without having to manually attach hoses.











EXCAVATOR ATTACHMENTS GUIDE

BUCKETS







HD DIGGING BUCKET WELDED SIDE CUTTERS

Carrier weight	Width	Capacity	
10 to 49 tons	20 to 75 inches	0.35 to 3.90 yd ³	
			Scan for complete

Made to handle various small materials in the construction industry.

Optimized angle filling and dumping.

Reversible attachment available.



SHD SUPER HEAVY DUTY BUCKET WELDED SIDE CUTTERS

Carrier weightWidthCapacity10 to20 to0.35 to49 tons75 inches3.90 yd3



product specifications

Made to handle various small to medium sized materials in the construction industry, such as stones.

With all the features of the Digging Bucket and more:


- Made of high-resistance steel.
- Optional welded heels available.

- Optional edge protection available.



XHD EXTREME DUTY BUCKET

carrier weight 10 to 49 tons



Сарасіту 0.35 to 3.90 yd³



Made to dig in extreme conditions and handle all kinds of heavy duty materials.

With all the features of the Super Heavy Duty Bucket and more:

- Thicker wear bars underneeth the bucket.
- Made with heavy duty teeth.
- Optional outisde and inside reinforcements.
- Optional inner bottom lining.



GGING BUCKET BOLTED SIDE CUTTERS

carrier weight	width	capacity	
10 to	20 to	0.35 to	
49 tons	75 inches	3.90 yd ³	
		-	Scan for complete product specifications

Made to handle various small materials in the construction industry.

Optimized angle filling and dumping.

Reversible attachment available.



DEC

Carrier weight Width Capacity 0.35 to 10 to 20 to 3.90 yd³ 49 tons 75 inches Scan for complete product specifications

Made to handle various small to medium sized materials in the construction industry, such as stones.

With all the features of the Digging Bucket and more: - Made of high-resistance steel. - Optional welded heels available. - Optional edge protection available.





AVAILABLE BUCKET OPTIONS



		DIGGING BUCKET HD	SUPER HEAVY DUTY BUCKET SHD	EXTREME DUTY BUCKET XHD
-	Under and side plates in High Resistance Steel			
1	Wear Bars			Thicker
2	Tooth size	Standard	Standard	Heavy Duty
3	Side Cutters	Welded/Bolt-on	Welded/Bolt-on	Welded/Bolt-on
4	Welded Heels	N/A	Optional	Optional
5	Edge Protection *	N/A	Optional	Optional
6	Outside Reinforcements	N/A	N/A	Optional
7	Inside Reinforcements	N/A	N/A	Optional
8	Inner Bottom Lining	N/A	N/A	Optional
9	Hook			

* Half harrow + chocky bar.





DITCHING BUCKET

carrier weight 10 to 49 tons

48 to 84 inches **Capacity** 0.80 to 4.00 yd³



Filling and dumping at an optimized angle.

Maintenance time reduced.



TILT DITCHING BUCKET

carrier weight 10 to 39 tons width 60 to 84 inches **Сарасіту** 0.70 to 2.50 yd³



Hydraulic cylinders with total protection from debris.


45° tilt on each side.

Hardened chrome-plate axle with greaseable wearing rings.



SKELETON BUCKET WITH TEETH

carrier weight 10 to 49 tons



Capacity 0.85 to 3.20 yd³



Scan for complete product specifications

Ideal for recycling materials.

Two models available: general-purpose bucket and ditching bucket.

Variable bucket tooth spacing.



_			
		ICK	

carrier weight	width	capacity	
10 to	24 to	0.50 to	
23 tons	48 inches	1.40 yd ³	
			Scan for complete product specifications

Digs, levels, handles and sorts.

Combine use of a grapple, the strength of a standard thumb, and the functions of a ditching bucket.



GRAPPLE BUCKET

Carrier weight 10 to 49 tons

Width 36 to 60 inches Capacity 0.75 to 2.50 yd³



Increases precision and control.

Maximizes the performance of your attachments.

Increases the productivity and versatility of your machine.



PEZOIDAL BUCK RA

Carrier weight 10 to 39 tons

Width 66 to 94 inches

Capacity 0.75 to 2.25 yd³



Scan for complete product specifications

Ideal for digging ditches.

Increase productivity with its 45° angles.





RECESSED BUCKET

carrier weight 10 to 39 tons width 30 to 54 inches **Сарасіту** 0.70 to 2.20 yd³



Provides the same digging power as the original bucket.

Reduces the risk of the bucket possibly damaging the excavator.



SCREENING BUCKET

carrier weight 10 to 39 tons width 52 to 74 inches **с**арасіту 1.00 to 2.75 yd³



Ideal for recycling materials.

Sleeve opening from 1 to 6 inches are available.

Rotates on both sides.





GRADDING BUCKET WITH MINIMIZED CORNERS

Carrier weight	Width	Capacity	
10 to 29 tons	48 to 96 inches	0.80 to 2.00 yd ³	
			Scan for complete

GTR Coupling System Compatible

Minimized corners for a better clearance during the Tiltrotator's rotation.

Optimized material selection to lower weight without compromising durability.

Available with a bolt-on cutting edge.



DIGGING BUCKET

carrier weight 10 to 29 tons width 32 to 57 inches **Capacity** 0.70 to 2.00 yd³



product specifications

Scan for complete product specifications

GTR Coupling System Compatible

Optimized material selection to lower weight without compromising durability.

Pre-drilled holes ready for bolt-on side cutters.

Back wear plates made of abrasion-resistant AR500 steel.

Available in multiple tooth configurations.



TRENCH BUCKET

carrier weight 10 to 29 tons width 16 to 26 inches ^{Capacity} 0.40 to 0.90 yd³



Scan for complete product specifications

GTR Coupling System Compatible

Dig deep trenches without the Tiltrotator having to go below the surface level. Optimized material selection to lower weight without compromising durability. Back wear plates made of abrasion-resistant AR500 steel.





EXCAVATOR ATTACHMENTS GUIDE

THUMBS













HYDRAULIC THUMB ON STICK AXLE

carrier weight 10 to 49 tons

Weight	
550 to 3,125	-

tines 2 or 4



Choice of two or four profiled tines.

135° rotation.

XHD cylinders included from 10 to 40 tons.



PROGRESSIVE HYDRAULIC THUMB

carrier weight 10 to 39 tons тіnes 2 or 4

Rotation More than 180°



XHD cylinders included from 10 to 40 tons.



UNIVERSAL HYDRAULIC THUMB

Length 52 to 85 inches weight 465 to 2,105 lbs

Rotation 130°



130° rotation.

Cushion-shock absorbers are included.

Light and compact design.

Two possible length setups.










SPECIALTY PRODUCTS

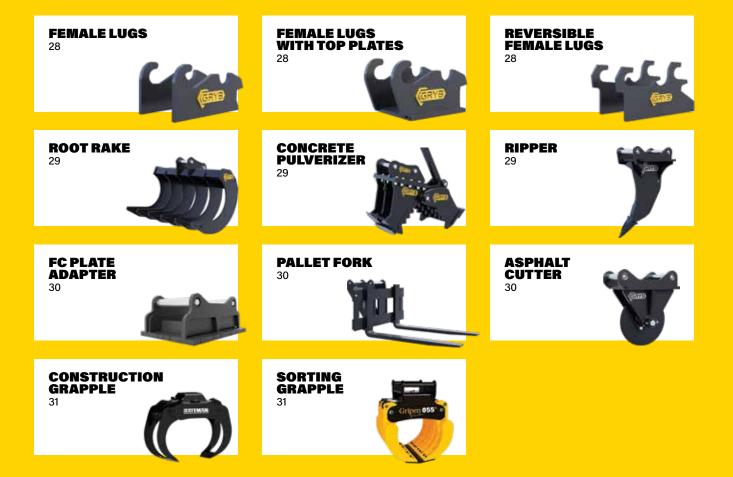





FEMALE LUGS

carrier weight 10 to 49 tons



Compatible with all types of wedge or pin-on attachments.

With or without excess under the quick coupler.

Available in standard or reversible configurations to fit your needs.



FEMALE LUGS WITH TOP PLATE

carrier weight 10 to 49 tons

Compatible with all types of wedge or pin-on attachments.

Custom-made to fit your needs.







Scan for complete product specifications

Compatible with all wedge couplers.

10 to 49 tons

With or without excess under the wedge coupler.



ROOT RAKE



Multiple configuration available for the spacing between tines.



CONCRETE PULVERIZER

carrier weight 10 to 49 tons width 26 to 48 inches weight 2,000 to 12,500 lbs



product specification

Strongest jaw on the market.

Mounted on a bolt-on interchangeable top plate.

Fastest execution system and the biggest strength ratio on the market.





carrier weight 10 to 49 tons Length 36 to 48 inches



Scan for complete product specifications

Offers superior digging force.

Interchangeable bolt-on tooth.

Minimal maintenance is required.

COUPLERS

BUCKETS





FC PLATE ADAPTER

carrier weight 10 to 40 tons

GTR Coupling System Compatible

Flexible and robust.

Mount different tools and attachments.

Designed for the nordic market.



PALLET FORK

carrier weight 10 to 29 tons width 60 inches

Capacity 12,600 to 21,100 lbs



Scan for complete product specifications

GTR Coupling System Compatible

Multiple mechanical configuration available.



ASPHALT CUTTER

carrier weight 10 to 19 tons weight 410 lbs



GTR Coupling System Compatible

Designed to last.



NSTRUCTION

Carrier weight 10 to 49 tons

Weight 364 to 1,830 lbs

Capacity 6,614 to 22,046 lbs

GTR Coupling System Compatible

Perfect tool to widen the range of operation available with the tiltrotator.

Application areas include heavy lifting, stone laying, sorting, loading of cut-to-length timber, waste wood handling, light demolition etc.

High clamping force.



ORTING GRAPPLE

Carrier weight 10 to 49 tons

Weight 441 to 2,425 lbs Capacity

3,000 to 10,000 lbs

GTR Coupling System Compatible

Suited for use in building and construction sites and recycling.

Load retention valve and piston accumulator integrated with the hydraulic system.

Very stable.

Close tip to tip.



1-844-604-1396 - INFO@GRYB.COM

FOLLOW US () 🖸 🗖 🗗 👌

GRYB

CONSTRUCTION



GRYB.COM

GR-CA-EXCAVATOR-E-25-01